

ZUP SERIES

Laboratory AC/DC Supplies: 200 - 800 Watts



Features

- Universal input 85~264VAC with PFC
- Input current harmonics to EN61000-3-2
- Constant voltage/constant current operation
- Built-in RS232 and RS485 interface
- GPIB programming option
- External voltage or resistance programming
- Parallel operation (master/slave)
- Last setting memory with safe restart or automatic restart options
- CE marked for LVD and EMC regulation

Specifications

INPUT VOLTAGE:	85 ~ 264VAC
FREQUENCY:	47 ~ 63Hz
INPUT CURRENT (@230VAC):	ZUP200W: 1.5A ZUP400W: 2.7A ZUP800W: 5.4A
INPUT HARMONICS:	Complies with EN61000-3-2
POWER FACTOR:	Corrected @ 0.99
EFFICIENCY:	Model dependent: 68~84%
LOAD REGULATION:	0.01% +3mV (CV) 0.02% +5mA (CC)
LINE REGULATION:	0.01% +2mV (CV) 0.01% +2mA (CC)
RIPPLE:	5mV rms (CV) 7.5-100mA (CC)
PROTECTION:	<ul style="list-style-type: none"> • Over voltage • Over temperature • Over current foldback
OPERATING TEMP:	0°C to +50°C @ 100% load
HUMIDITY:	30~90% RH non-condensing
OUTPUT ON/OFF:	By TTL signal or voltage free contacts
VOLTAGE PROGRAMMING:	By voltage (0~4V). By resistance (0~5Kohm)
CURRENT PROGRAMMING:	By voltage (0~4V). By resistance (0~5Kohm)
REMOTE SENSING:	Yes, maximum 0.5V drop compensation
COMMUNICATION INTERFACE:	RS232 and RS485 built-in. IEEE488 - option
DISPLAY:	Voltage meter and current meter
LED STATUS:	<ul style="list-style-type: none"> • CC/CV • Alarm • Foldback • Local/remote • On/Off
SAFETY:	Approvals to UL3111-1, EN61010-1
EMC:	EN61326, IEC61326
DIMENSIONS:	200/400W: 70 x 124 x 350mm 800W: 140 x 124 x 350mm
WEIGHT:	200W: 2.9Kg. 400W: 3.2Kg. 800W: 5.8Kg.

MODEL	Output		Power W
	V	A	
ZUP6 - 33	0~6V	0~33A	200W
ZUP6 - 66	0~6V	0~66A	400W
ZUP6 - 132	0~6V	0~132A	800W
ZUP10 - 20	0~10V	0~20A	200W
ZUP10 - 40	0~10V	0~40A	400W
ZUP10 - 80	0~10V	0~80A	800W
ZUP20 - 10	0~20V	0~10A	200W
ZUP20 - 20	0~20V	0~20A	400W
ZUP20 - 40	0~20V	0~40A	800W
ZUP36 - 6	0~36V	0~6A	200W
ZUP36 - 12	0~36V	0~12A	400W
ZUP36 - 24	0~36V	0~24A	800W
ZUP60 - 3.5	0~60V	0~3.5A	200W
ZUP60 - 7	0~60V	0~7A	400W
ZUP60 - 14	0~60V	0~14A	800W
ZUP80 - 2.5	0~80V	0~2.5A	200W
ZUP80 - 5	0~80V	0~5A	400W
ZUP120 - 1.8	0~120V	0~1.8A	216W
ZUP120 - 3.6	0~120V	0~3.6A	432W


Instruction Manual is available from our website:
Application Notes: ZUP Series




ZUP SERIES

Laboratory AC/DC Supplies: 200 - 800 Watts

FRONT PANEL

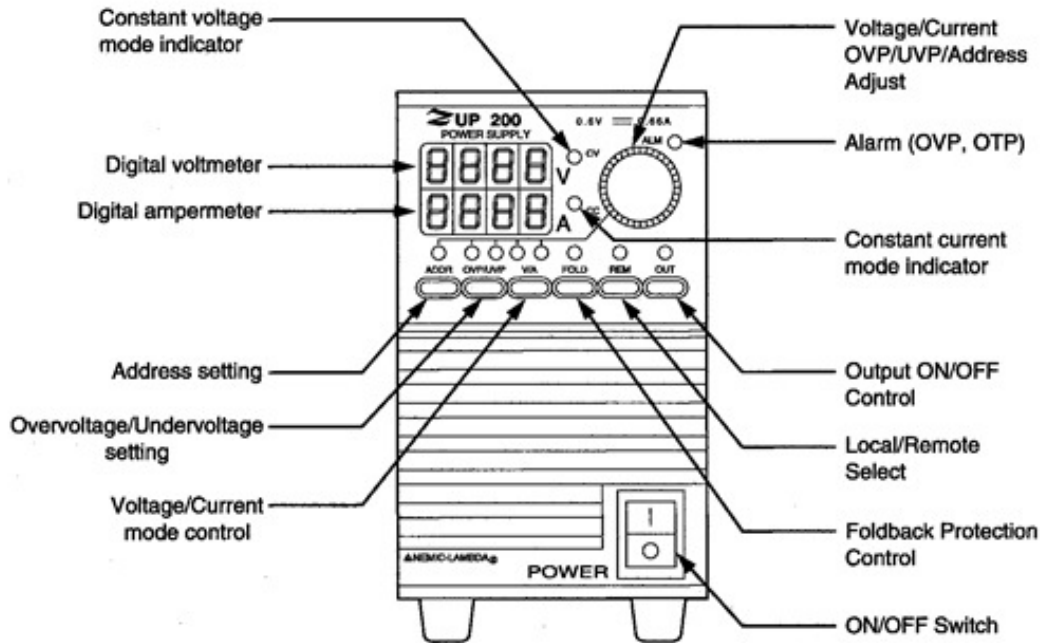

OUTLINE DRAWING (200 - 400W)

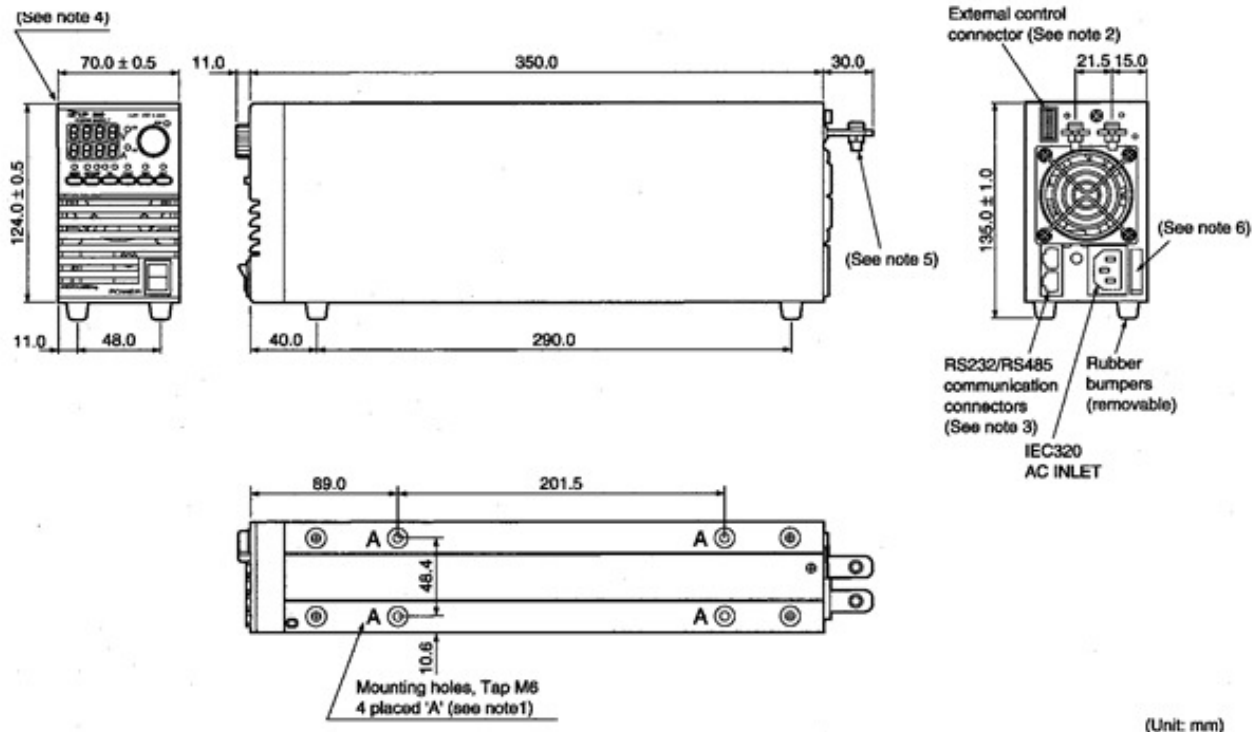

(Unit: mm)

Notes:

1. Mounting screws must not protrude into the power supply more than 6mm.
2. External control connector
Connector: AMP, P/N 102617-5
Receptacle: AMP, P/N 87631-9
Receptacle contacts: AMP, P/N 87523-5(strip form)
P/N 87523-6(loose piece)
Wire AWG: 24 to 20
Hand tool for wires connection: AMP, P/N: 90202-2

3. RS232/RS485 communication
EIA/EIA-568A, shielded, 8 contacts connectors
4. Model name and output rating are shown here according to the specifications.
5. M6 or M4 screws for load wires connection.
6. Input voltage and current rating are shown here according to the specifications.